



SOLUTIONS FOR MARINE ENVIRONMENTS

CHOOSE OWATROL®,
IT'S THE CERTAINTY OF
A LASTING PARTNERSHIP.
owatrol.com

OWATROL
MARINE



Owatrol® is a Durieu Group brand, a French family SME with a staff of 150 internationally, **which is celebrating its 100th anniversary in 2023.**

Committed to **an innovative and ecologically responsible approach**, the group **does its manufacturing in France**, at its own production sites, and distributes high-tech products (paints, stains, varnishes, plastic restorers, lubricants and detergents) **to protect and beautify primarily metal and wood substrates.**

The group's steadfast ethics in offering products, without compromising on their performance or regulation and long-lasting effects over time, are a core asset which enables it to adjust to the challenges of tomorrow. Its R&D department has been striving for years to develop product formulas that are more and more responsible.

The Owatrol® marine line does not stray from this and **provides high quality solutions** in order to preserve substrates for as long as possible (wood, metal, gelcoat, etc.).

**OWATROL®... products that make
maintaining your marine equipment easier!**

SUMMARY

| | |
|---|----|
| CLEANER AND BRIGHTENER FOR ALL TYPES OF WOOD DECK CLEANER | 4 |
| OIL REMOVER AND CLEANER FOR ALL TYPES OF WOOD DEEP CLEANER | 5 |
| PAINT, VARNISH AND ANTI-FOULING STRIPPER MARINE STRIP | 6 |
| SATURATOR FOR EXOTIC WOOD DEKS OLJE D.1 | 7 |
| MARINE QUALITY HIGH GLOSS VARNISH DEKS OLJE D.2 | 8 |
| NON-SLIP WOOD PROTECTOR OWATROL®-ATG | 9 |
| MARINE TEAK AND CORK SATURATOR TEAK PROTECT | 10 |
| MULTI-PURPOSE, COLOURLESS RUST INHIBITOR MARINE OIL | 11 |
| ANTI-CORROSIVE PRIMER OWATROL®-C.I.P. | 12 |
| ANTI-CORROSIVE PAINT RUSTOL-DECO | 13 |
| MARINE ALUMINIUM PAINT OWATROL®-GLV | 14 |
| UNIVERSAL ANTI-CORROSIVE PRIMER PID 60 MARINE | 15 |
| ANTISLIP POLYURETHANE COATING OWAGRIP | 16 |
| MULTI-PURPOSE PENETRATING LUBRICANT TRANSYL® | 17 |
| PREMIUM MARINE ENAMEL OWALAK | 18 |
| GELCOAT AND SURFACE RESTORER MARINE POLYTROL® | 19 |
| HULL AND DECK CLEANER OWACLEAN | 20 |
| GELCOAT AND METAL RENOVATOR OWAYELL | 21 |
| FENDER CLEANER + BLACK MARK REMOVER BLACKBAT 2 IN 1 | 22 |
| 2PK GLASSFIBRE POLYESTER FILLER CHOUKROUT | 23 |



CLEANER AND BRIGHTENER FOR ALL TYPES OF WOOD

DECK CLEANER*

Grey and stain remover for wood: decks, outdoor furniture, etc.

- Revives wood greyed by harsh weather, without affecting its colour.
- Thoroughly cleans wood.
- Removes surface traces of limescale and rust.
- Cleans varnished surfaces.
- Does not damage paintwork.
- Gel formula, does not run.
- Neutralises Marine Strip and Deep Cleaner.



Packaging:
1L, 2.5L, 15L



COVERAGE
5 to 10 m²/L



APPLICATION TOOLS
Brush, Roller, Scrubbing brush



APPLICATION TEMPERATURE
+5°C - +30°C



CLEAN-UP WATER

* Dangerous - Follow the precautions for use. (1) Test: OCDE 301 F.



OIL REMOVER AND CLEANER FOR ALL TYPES OF WOOD **DEEP CLEANER***



Removes oils, grease stains, etc.

- Restores the natural appearance of wood blackened by oil.
- Also works with engine oil.
- Fast-acting without sanding, stripping or sandblasting.
- Gel formula, does not run.
- Fast-acting: works in as little as 5 minutes.



Packaging:
2.5L



COVERAGE
± 6 m²/L



**APPLICATION
TOOLS**
Brush, roller



**APPLICATION
TEMPERATURE**
+5°C - +30°C



**CLEAN-UP
WATER**

* Dangerous - Follow the precautions for use. (1) Test-OCDE 301 F.



PAIN**T** STRIP**PER**, ANTI-FOULING AND VARNISH MARINE STRIP*

- Effortless stripping without scraping.
- Can be used on wood**, metal**, plastic and gelcoat.
- Solvent free. Water washable.
- Strips several layers in a single application.
- Gel formula, does not run.



EXT.

Packaging:

1L, 2.5L, 10L



COVERAGE
± 4 m²/L



APPLICATION TOOLS
Synthetic Brush, Roller,
Scrubbing Brush.



APPLICATION TEMPERATURE
+5°C - +35°C



CLEAN-UP WATER

* Dangerous - Follow the precautions for use. ** Except Oak, Chestnut, Red Cedar, marquetry and aluminium. (†) Test OCDE 301 F.

SATURATOR FOR EXOTIC WOOD

DEKS OLJE D.1*

DEKS OLJE D.1 protects exotic wood from weathering.

- Designed for dense, greasy, hard to penetrate woods.
- Excellent penetration of substrates.
- Made from alkyd resins and natural oils.
- Non-film forming, deeply nourishes the wood.
- Oiled, silken finish.



INT./EXT.

Packaging:

1L, 2.5L, 10L, 20L



COVERAGE
1 to 4 m²/L
MULTICOAT
SYSTEM



APPLICATION
TOOLS
Brush, Roller




APPLICATION
TEMPERATURE
+5°C - +30°C



DRYING
24 - 48h



CLEAN-UP
WHITE SPIRIT

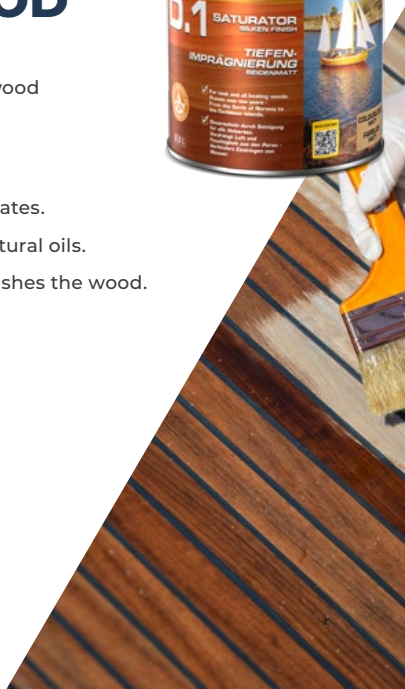

* Dangerous - Follow the precautions for use.



MARINE QUALITY HIGH GLOSS VARNISH

DEKS OLJE D.2*

Finish specially designed for marine environments.

- Finish for exotic woods.
- Transparent varnish, doesn't hide the grain of the wood.
- Flexible and long-lasting.
- Ensures long-lasting protection thanks to the presence of anti-UV agents.
- Easy maintenance.
- Highly resistant to dry and wet abrasion (particularly saltwater).



INT./EXT.

Packaging:

1L, 2.5L, 10L, 20L



COVERAGE
10 to 12 m²/L



APPLICATION
TOOLS
Brush, Roller



APPLICATION
TEMPERATURE
+10°C - +30°C



DRYING
Recoat 12h



CLEAN-UP
WHITE SPIRIT

© Douglas Freer™

* Dangerous - Follow the precautions for use.




NON-SLIP WOOD PROTECTION

OWATROL®-ATG*

Non-slip finish with good UV- and weather resistance.

- Decks, docks, pontoons, steps, walkways.
- Contains slip resistant microbeads made of micronised polypropylene wax.
- Maintains the natural look of the wood.
- Protects against weathering.
- Easy to apply.
- For all wood types.

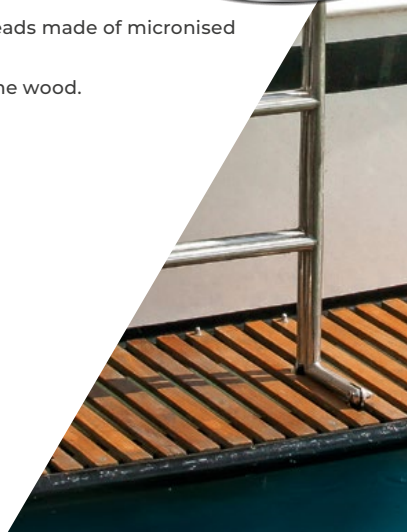

EXT.

Packaging:

Clear: 1L, 2.5L - Light Teak: 1L, 2.5L



COVERAGE
± 13 m²/L



APPLICATION TOOLS
Brush, Roller,
Spray



APPLICATION TEMPERATURE
+5°C - +30°C



DRY IN 24h
COMPLETELY DRY
5 DAYS



CLEAN-UP
WHITE SPIRIT

* Dangerous - Follow the precautions for use.

MARINE SATURATOR FOR TEAK AND CORK

TEAK PROTECT*

Nourishing, long-lasting, high protection against the harshest weathering. Decks, furniture, etc. All wood types.


- Non-film forming protection that is ready to use.
- Excellent penetration of the substrate. Does not form a film on the surface.
- Long-lasting UV protection.
- Enhances the natural beauty and grain of the wood.
- Protects against water damage.
- May be applied to new or old prepared wood.
- Easy maintenance, no sanding or stripping.



EXT.

Packaging:

Teak: 1L - Honey: 1L

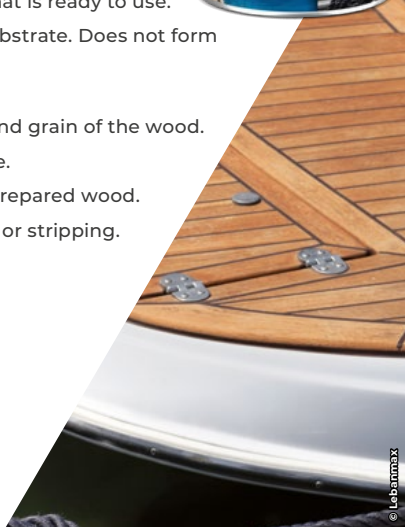

COVERAGE
5 m²/L
Maintenance:
10 to 12 m²/L



APPLICATION TOOLS
Brush, Roller,
Spray



APPLICATION TEMPERATURE
+5°C - +30°C



DRYING
4h
Fully dry
24h



CLEAN-UP WATER



MULTIPURPOSE COLOURLESS RUST INHIBITOR MARINE OIL*

Deep and long lasting - stops and stabilises rust.

- Can be applied to ferrous and non-ferrous metal, plastic, glass and wood.
- Can be added to oil/alkyd based finishes - paints, varnishes, woodstains.
- Makes paint rust inhibiting.
- Bonding coat for all smooth surfaces.
- Isolates the substrate from the air and moisture.
- Forms a flexible protective film.



INT./EXT.

Packaging:

0.5L, 1L, 5L



COVERAGE
± 18 m²/L



APPLICATION
TOOLS
Brush, Roller,
Spray



APPLICATION
TEMPERATURE
+5°C - +30°C



DRYING
Touch dry 12h
Recoat 24-48h



CLEAN-UP
WHITE SPIRIT

* Dangerous - Follow the precautions for use.

ANTI-CORROSIVE PRIMER

OWATROL®-C.I.P.*

OWATROL®-C.I.P. is a rust inhibiting primer made from OWATROL® OIL* that can be overcoated with any type of finish, including two-pack coatings. It is ideal for extreme conditions (corrosive vapours, seaside, etc.).

- Can be overcoated with single and two-pack coatings.
- Penetrates down to the base metal.
- Adheres to any metallic surface.
- Protects emergent and submerged substrates.
- Withstands peak temperatures of +175°C.
- Fills in microcavities.



INT./EXT.

SEE THE VIDEO



BRICK RED

Packaging:

0.75L, 2.5L



COVERAGE
15 m²/L
per coat



APPLICATION
TOOLS
Brush, Roller,
Spray



APPLICATION
TEMPERATURE
+5°C - +30°C



DRYING
Touch dry 6h
Recoat 24-96h,
max. 7 days



CLEAN-UP
WHITE SPIRIT

* Dangerous - Follow the precautions for use.

ANTI-CORROSIVE PAINT

RUSTOL-DECO*

- Rust inhibiting treatment and decorative finish.
- Can be applied directly onto the sound rust due to the excellent penetration and adhesion qualities of OWATROL® OIL*.
- Exceptional resistance to weathering, moisture and pollution.
- Penetrates down into the tiniest pores and firmly bonds to the surface.
- Withstands peak temperatures of +175°C.
- Flexible film, does not crack.

Packaging:

0.75L, 2.5L, 20L

INT./EXT.



© Packshot
* Dangerous - Follow the precautions for use.

Available in 12 GLOSS RAL colours:

| | | | | | |
|----------------------------------|---------------------------------|---------------------------------------|---------------------------------------|---------------------------|----------------------------------|
| | | | | | |
| RAL 9010 PURE WHITE | RAL 7037 DARK GREY | RAL 7040 GREY | RAL 7016 ANTHRACITE GREY | RAL 9005 BLACK | RAL 6009 DARK GREEN |
| | | | | | |
| RAL 5002 BLUE | RAL 3001 DEEP RED | RAL 8017 CHOCOLATE BROWN | RAL 8028 BROWN | RAL 1007 YELLOW | RAL 6005 GREEN |

+ 3 micaceous colours and 3 bases for matt/satin/gloss.



COVERAGE
± 15 m²/L



APPLICATION
TOOLS
Brush, Roller,
Spray



APPLICATION
TEMPERATURE
+5°C - +30°C



DRYING
Touch dry 6h
Dry 24h
Hard Dry 10 days



CLEAN-UP
WHITE SPIRIT



MARINE ALUMINIUM PAINT

OWATROL®-GLV*

An opaque, semi-gloss, rust inhibiting, galvanise coloured decorative coat.

- Can be applied directly to sound rust.
- Isolating: removes air and moisture.
- Stops and stabilises rust without chemical action.
- Excellent light and heat reflecting properties.
- Ideal for harsh ambient conditions.
- Highly flexible.
- Withstands temperatures of up to 175°C.



GALVANISED

INT./EXT.

Packaging:

0.75L, 2.5L



COVERAGE
± 18 m²/L



APPLICATION
TOOLS
Brush, Roller,
Spray



APPLICATION
TEMPERATURE
+5°C - +30°C



DRYING
Recoat 8 - 24h
Dry 24h



CLEAN-UP
WHITE SPIRIT



* Dangerous - Follow the precautions for use.



UNIVERSAL ANTI-CORROSIVE PRIMER

PID 60 MARINE*

A single pack anti-corrosive primer and undercoat for substrates in sound condition and rust free.

- Can be over-coated with any single or two pack coating.
- Can be applied to gelcoat, polyester, steel, old paint.
- Excellent adhesion to smooth surfaces (aluminium, zinc and galvanised steel).
- Quick drying.



MID-GREY
RAL 7015

INT./EXT.

Packaging:

0.75L, 2.5L



COVERAGE
9 to 10 m²/L



APPLICATION
TOOLS
Brush, Roller,
Spray



APPLICATION
TEMPERATURE
+10°C - +25°C



DRYING
1h



CLEAN-UP
WHITE SPIRIT



* Dangerous - Follow the precautions for use.

ANTI-SLIP POLYURETHANE COATING

OWAGRIP*

A non-slip single pack paint with a polyurethane resin base.

- UV resistant.
- Excellent wear resistance.
- Satin finish - Limits glare and accumulation of dirt
 - Easy cleaning.
- Double action non-slip fillers - Surface filler and Base filler - Long lasting performance.
- Can be applied to gelcoat, old paintwork, steel, aluminium and wood.



INT./EXT.

Packaging:

1L, 2.5L



WHITE



CHAMPAGNE



LIGHT GREY



COVERAGE
9 - 10 m²/L



APPLICATION
TOOLS
Brush, Roller,
Spray



APPLICATION
TEMPERATURE
+5°C - +30°C



DRYING
Touch Dry 6h
Recoat 12h
Dry 24h



CLEAN-UP
WHITE SPIRIT




MULTIPURPOSE PENETRATING LUBRICANT TRANSYL®*

A technical product that can be used for everything! TRANSYL® meets the needs of both professional and amateur yachtsmen.

- Effortless unblocking and unclogging.
- Dissolves grease, oil, tar, glue and other residue.
- Lubricates and unblocks assemblies that are seized due to rust.
- Works on its own, with unparalleled wetting and self-spreading action.
- Reaches the most inaccessible places.
- Prepares boats for wintering.
- Insulates electrical systems.
- Removes water and moisture.
- Does not contain silicone.
- Withstands peak high temperatures of up to +300°C.

Packaging:

200mL spray, 400mL spray,
1L, 5L, 20L

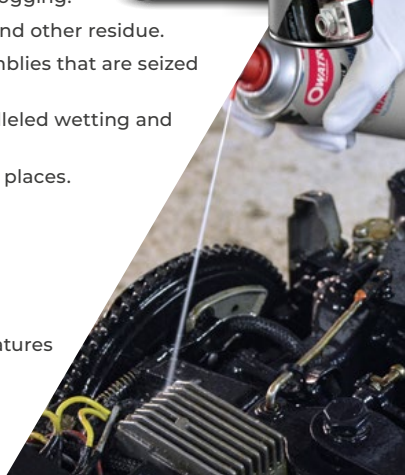

INT./EXT.



APPLICATION
TOOLS
Brush, Spray,
Dipping



APPLICATION
TEMPERATURE
-30°C - +50°C



CLEAN-UP
WHITE SPIRIT

* Dangerous - Follow the precautions for use.

HIGH GLOSS PREMIUM MARINE ENAMEL

OWALAK*

- High-tech single-pack alkyd lacquer.
- Excellent colour and gloss retention.
- Anti-corrosive properties.
- Contains UV protection agents.
- Suitable for extreme weather conditions.
- Renews, protects and decorates dull surfaces.
- Good mechanical and chemical resistance.
- Flexible and adheres on all surfaces.




WHITE

EXT.

Packaging:

1L, 2.5L

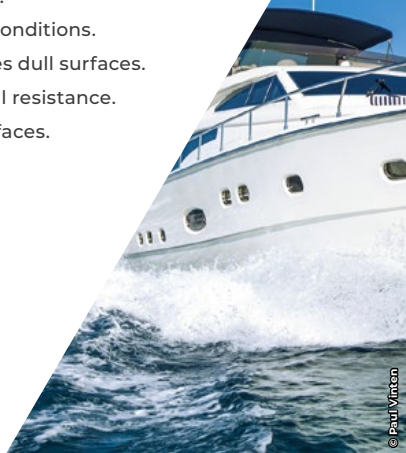

© Pauli Vintenn

* Dangerous - Follow the precautions for use.



COVERAGE
± 10 m²/L



APPLICATION
TOOLS
Brush, Roller,
Spray



APPLICATION
TEMPERATURE
+5°C - +30°C



DRYING
Touch Dry 4h
Recoat 8h
Dry 24h



CLEAN-UP
WHITE SPIRIT



GELCOAT AND SURFACE RESTORER

MARINE POLYTROL®*

Restores colour and appearance to faded surfaces.
Restores the shine to polished metal, chrome and also stainless steel.

- Restores faded and dulled surfaces without removing material.
- Does not leave a film on the surface: no risk of peeling.
- Restores colour and appearance to faded gelcoats and hulls.
- Works deep in the material, which is restored from the inside.
- Fills in all the microcavities of the surface it is applied to, waterproofing and ensuring long-term protection. Works on perspex.
- Removes traces of rust on stainless steel.
- Silicone-free.



INT./EXT.

Packaging:

0.5L, 1L



COVERAGE
± 18 m²/L



APPLICATION TOOLS
Brush, Roller,
Lint free cloth



APPLICATION TEMPERATURE
+5°C - +30°C



DRYING
Touch Dry 12h
Dry 24h



CLEAN-UP
WHITE SPIRIT

* Dangerous - Follow the precautions for use.



HULL AND DECK CLEANER

OWACLEAN*

Multi-purpose cleaner allowing easy maintenance of boat hulls and decks. Effortlessly degreases and removes dirt and stains. Protects your surfaces without leaving any residue.

- Degreases, cleans and removes dirt and grime stuck in micropores.
- Ideal for regular maintenance of gelcoat, decks, lacquer, stainless steel, etc.
- Removes traces of dirt.
- Residue and smear free after rinsing.
- Concentrated formula, must be diluted.
- Non-aggressive. Will not damage the surface.
- Removes mould and other similar markings.



Packaging:

1L



EXT.



APPLICATION
TOOLS
Brush, Spray



CLEAN-UP
WATER

* Dangerous - Follow the precautions for use. (1) Test: OCDE 301 F.

GELCOAT AND METAL RENOVATOR

OWAYELL*

Fast acting renovator for the removal of yellow staining, limescale, rust spots and pitting from gelcoat, stainless steel and other surfaces. Gel formula, does not run.

- Removes yellow staining, mould and rust marks.
- Restores and whitens gelcoat.
- Dissolves limescale, sea salt and water marks by solubilising the calcium: hulls, perspex portholes, etc.
- Eliminates rust streaks and traces.
- Cleans and renews anti-slip surfaces.
- Breaks down dirt and stains caused by micro-organisms and barnacle/shell residue where they most commonly accumulate.
- Restores shine to stainless steel (eliminates pitting due to rust), to anodised aluminium and chrome surfaces damaged by salt and calcium.



Packaging:

1L



EXT.



APPLICATION TOOLS
Brush, Roller,
Cloth



APPLICATION TEMPERATURE
+5°C - +30°C



CLEAN-UP WATER



* Dangerous - Follow the precautions for use.

FENDER CLEANER/ BLACK MARK REMOVER

BLACKBAT* 2 IN 1

A 2 in 1 fast acting cleaner that removes dirt and black marks from fenders, inflatables, hulls, decks, vinyl and artificial leather.

- Quickly and thoroughly eliminates marks and tough stains caused by: air pollution, bad weather, rubbing against docks, footprints, sails and smoke marks, carbon traces, grease deposits, tar, salt, black marks, etc.
- Restores the treated surface to its original state.
- Cleans the grime caused by fumes, pollution, etc.
- Powerful degreasing formula.
- Enriched with pine oil for optimum effectiveness on oil residues.
- Does not alter or damage the surface.



Packaging:

500mL spray, 2.5L

SEE THE VIDEO



EXT.



APPLICATION
TOOLS
Brush, Cloth,
Sponge, Sprayer



APPLICATION
TEMPERATURE
+5°C - +30°C




CLEAN-UP
WHITE SPIRIT



2PK GLASSFIBRE POLYESTER FILLER CHOUKROUT*

CHOUKROUT seals and repairs damaged surfaces. The fibreglass integrated into its formula gives it very strong mechanical resistance and a malleable structure that is easy to shape.

- Two pack filler reinforced with fibreglass to fill holes in surfaces.
- Excellent adhesion to most surfaces: metal, aluminium, wood, stone, plastic, etc.
- Highly resistant to water, petrol, mineral oil, diluted acid and alkalis.
- Easy to use. Easy to sand.
- Highly shock resistant.
- Can be over-coated with any kind of paint (single or two-pack).

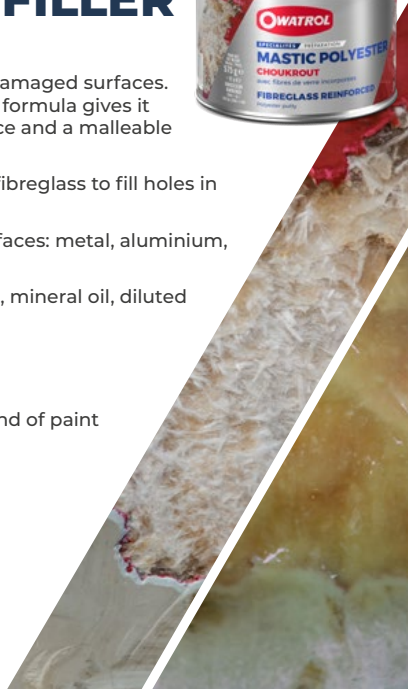

SEE THE VIDEO



INT./EXT.

Packaging:

300g, 600g



COVERAGE
For a hole 2cm
in diameter and
0.5cm in depth,
use 5g of mixture.



**APPLICATION
TOOLS**
Filling Knife



**APPLICATION
TEMPERATURE**
+5°C - +30°C



DRYING
Dry 10 min
Over-coat 30 min



CLEAN-UP
Acetone,
Synthetic
diluent

* Dangerous - Follow the precautions for use.

OWATROL

INTERNATIONAL S.L.U.

C/ Consell de Cent 322, entlo D
08007 BARCELONA - SPAIN

Phone: +34 931 258 868
eMail: info@owatrol.com

Need advice?
Contact our experts on
owatrol.com



Our company approach to implementing our environmental responsibility:

- Development of increasingly responsible products.
- Management and processing of product waste.
- Use of recyclable packaging
- Encourage eco-friendly use.

OWATROL

is a brand



durieu.com

