

ELIXNET in 1*

CLEANS SURFACES AND KILLS MOSS

MOSSES OR SOILINGS?

- ELIXNET in 1 is a powerful cleaner for facades, roofs, paving, terraces, ... that also kills moss, lichens, fungi...
- Ready to use.
- Vertical and horizontal surfaces.
- Combination of active ingredients gives a bright clean surface.
- * Use biocides with caution. Read the label and the product information before use. Hazardous Follow the safety instructions.

5 L



ATM 007*

MOSS CLEANER

- Ready to use. Does not require rinsing.
- Professional formula.
- Facades, roofs, paving, terraces, etc.
- Kills mould mosses, lichens, algae, etc.
- Preventive and curative.
- * Use biocides with caution. Read the label and the product information before use. Hazardous Follow the safety instructions.

5L - 20L



ELIXFUGE*

WATER-REPELLENT FOR FACADES AND ROOFS

- Colourless.
- Professional formula.
- Waterproofs porous surfaces.
- Beading effect.
- * Hazardous Follow the safety instructions.

20 L



ELIXPERL

WATER-REPELLENT NEXT GENERATION

COLOURLESS COATING OR ADDITIVE

- Water-repellent protection for stones, paving, coatings, facades, marble...
- Colourless liquid.
- Can be overcoated with any finish after short weathering period
- Can be used as an additive in all water-based paints (5% to 20% depending on paint type) to give water-repellent characteristics.
- Silicone free.

2.5L - 10L

© Ivan Bajic

REPAIRING • TREATING 31

PREPARING SURFACES



E.S.P.

ENABLES THE KEYING OF PAINTS, VARNISHES...

ON ALL SMOOTH/SHINY SURFACES

- Ideal for: tiles, melamine, glass, PVC, lacquer, varnish, etc.
- Avoids sanding and stripping, etc.
- Colourless, does not conceal the surface.
- · Odourless.
- Does not attack the existing base or old coating.



1 L





FLOETROL®

AVOIDS BRUSH MARKS IN HOT OR WINDY WEATHER

IMPROVES FLOW OF WATER-BASED PAINTS

- Additive for water-based paints.
- Eases application: enables a ceiling to be painted effortlessly.
- Improves flow characteristics.
- Lubricates the nozzles during application with a spray gun.
- · Ideal for ceilings, walls, facades...



1 L - 2.5L - 10L



± 6 m²/1 used neat +35°C +5°C

OWATROL® €-B

FIXES CHALKY, POROUS AND UNSTABLE SURFACES

REDUCES THE RISK OF FLAKING

- Additive for water-based paints.
- Blocks and isolates the surface from various stains/traces of water, soot, smoke (ceiling).
- Isolates traces of tannin. Enables oak beams to be painted.
- Avoids the oxidation of non-ferrous metals (copper), prevents the development of verdigris.
- Improves the opacity of white with moderate covering power.
- Saves time: replaces separate stabilising primer.



1 L - 2.5L - 10L



ELIXFOND

SUBSTRATE HARDENER

- Colourless.
- Hardens, seals and bonds porous, destroyed or chalky surfaces, before finishing.
- Exterior/interior.





5L - 20L



ELIXIMPRESS

OPAQUE PRIMER

- White primer/sealer for facades and masonry.
- Reinforces and opacifies new or old facades.
- Improves bonding of finishes and reduces coverage needs.



15L



ELIXHYDRO

PAINT FOR FACADES

- Paint for facades and masonry.
- Monocoat.
- Hydropliolite technology.
- Improved bonding properties even on difficult surfaces
- Excellent weather resistance.
- Available in white, stone, millstone. Can be tinted.

15L



ELIXANE

PAINT FOR FACADES

- Water-repellent paint for facades and masonry.
- Matt mineral appearance.
- Siloxane/acrylic technology.
- Available in white, stone, millstone. Can be tinted.



15L

© Goran Boginavir

WALLS: **EXTERIOR PAINTS**

INTERIOR PAINTS



ELIXPRIM

PRIMER FOR WALLS - CEILINGS - PANELLING

- White primer/undercoat.
- Stabilises the surface.
- Excellent obliteration.



5L - 15L



ELIXISOL

PRIMER BLOCKING AND OPACIFYING

White primer/undercoat for uneven and stained walls and ceilings.



5L - 15L



ELIXCRYL MAT or SATIN

ACRYLIC FINISH MAT OR SATIN

Acrylic topcoat for walls and ceilings in good condition. White. Tintable. Fine stippled appearance.



5L - 15L



ELIXKYD

FINISH FOR ALL SURFACES

Acryl/alkyd finish for all surfaces. White. Tintable.

AVAILABLE IN 3 FINISHES:

MAT:

Fine stippled matt. Excellent obliteration. Rounded appearance. SATIN: Satin. Eggshell appearance. VELVET: Silk. Warm soft appearance.

5L - 15L

TECHNICAL PAINTS



ELIXSTAGE

BLACK MAT STAGE PAINT

MASKING BACKSTAGE AREAS LIGHT ABSORPTION - NON-REFLECTING

- Multi-purpose paint to mask backstage areas, stage and stage/set machinery. Quick drying even at low temperatures.
 Easily top coated with other paints. Ideal for stages, studios, theatre, recreational townhouse.
 Adheres to porous surfaces and even to metal for short periods of time.

- Aaneres .
 Low odour.

5L



LUMELIX

LUMINOUS PAINT

SAFETY LINE MARKING ACCESS MARKINGS

- Greenish translucent paint. Absorbs light to glow in the dark.

- Greenish translucent paint. Associations.
 Interior use only.
 Allows easy identification of walkways, doorways, exits, escape routes etc.
 Releases "light" for up to 12 hours depending on thickness of coating and previous exposure to natural or artificial light.
 Adheres to most substrates, paints or decorative coatings.

1 L



INDUSTRIAL PRIMER

ONE COAT ANTICORROSIVE PROTECTION

METALLIC FRAMES, GATES...

- Industrial primer is a temporary one coat anticorrosive primer for metal that is to be assembled and finished on site
 High compatibility with anticorrosive paints.
 Available in:





GREY

10 kg



ELIXLINE

LINE MARKING PAINT


SPORT SURFACES COURTS AND PITCHES - BOUNDARY LINES

- Line marking paint for hard and grass sports surfaces.
 Bright, white finish. Highly visible.
 Excellent resistance to rain does not dilute.
 Can be applied manually or mechanically.
 Application gives sharp, distinct lines.

15 kg



PREVENTION SAFETY

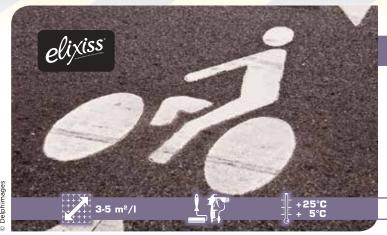

ELIXROAD*

ROAD MARKING PAINT

CAN BE SPRAYED WITH REFLECTIVE GLASS BEADS

- Solvent-based acrylic resin paint for roads and highways.
- Excellent resistance to normal traffic.
- High visibility. Good colour retention resistant to UV rays.
- Excellent covering power.



* Hazardous - Follow the safety instructions

6 kg - 30 kg



ELIXPHALT

ASPHALT AND SAFETY PAINT

MARKING

- Water-based acrylic paint.
- High resistance to traffic floors and roads.
- · High visibility. Good colour retention.
- Resistant to UV rays.
- Available in:











for reserved disabled parking spaces



OTHER SUBSTRATES

• Could be commanded anti-slip versus: "ELIXGRIP". Consult us.

5L - 15L



ELIXBEADS

FOR SPRAYING ON ELIXPOAD AND ELIXPHALT MARKING PAINT

High quality glass beads to improve the luminescence of road surface markings.

These glass beads are intended for use on private roads.

1 kg





PRIOR TO PAINTING OR INTENSIVE - CLEA-NING

Powerful all-purpose professional detergent.

 * Hazardous - Follow the safety instructions

5L



ELIXRESIN*

EPOXY PRIMER

PRIOR TO RESIN - MAXIMISES ADHESION

Two-component primer for floors. Reinforces adhesion and the finish.

* Hazardous - Follow the safety instructions

Two components A + B - 5L kit



ELIXGROUND*

FLOOR PAINT HEAVY TRAFFIC

HEAVY DUTY DECORATIVE - ANTI-DUST

Two-component water-based epoxy coating. Exceptional resistance - industry, trade and offices.

ODE!

DIACK

YFILOW

BLUE

CDEEN

DED

WHITE

* Hazardous - Follow the safety instructions

Two components A + B - 5L kit

elixiss +25°C

ELIXDUST


FLOOR HARDENER

PRIMER PRIOR TO PAINTING

Hardener/sealer for porous, dusty and uneven floors prior to painting or as a permanent dust proof sealer.

5L

MARKING • IDENTIFICATION

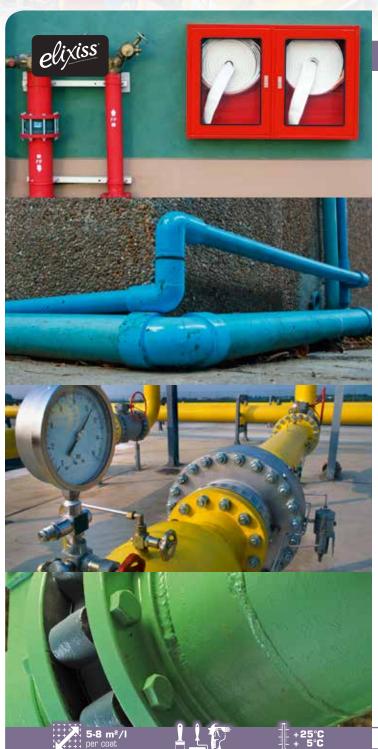

SAFELIX

SPECIAL SAFETY PAINT

SEMI-GLOSS FINISH STANDARDISED COLOUR FOR EQUIPMENTS



Red for pipes and fire equipments.



Blue for pipes and air-filled appliances.



Yellow for pipes and gas-filled appliances.



Green for pipes and water-filled appliances.

1L - 3L (only for RED)







OWATROL INTERNATIONAL

Barcelona Spain

contact@owatrol.com

As a responsible company our natural business approach has been to put in place measures, which contribute to the safeguarding of the planet and this is done through

- safeguarding of the planet and this is done in 5 key areas:

 Development of products less harmful to the environment,

 Management and treatment of waste product,

 Use of recyclable packaging,

 Detailed technical data for the user,

 Encouragement of eco-friendly use.



LINITOP

elixiss

