

MAINTENANCE
SOLUTIONS FOR
**AUTOMOBILES/
MOTORCYCLES**

CHOOSE OWATROL®,
IT'S THE CERTAINTY OF
A LASTING PARTNERSHIP.

owatrol.com

OWATROL®
ADD LIFE TO YEARS



Owatrol® is a Durieu Group brand, a French family SME with a staff of 150 internationally, **which is celebrating its 100th anniversary in 2023.**

Committed to **an innovative and ecologically responsible approach**, the group **manufactures in France**, at its own production sites and distributes high-tech products (paints, stains, varnishes, plastic restorers, lubricants, detergents) **for protecting and beautifying primarily metal and wood substrates.**

The group's steadfast ethics in offering products, without compromising performance and long lasting effects over time, is a core asset which enables it to adjust to the challenges of tomorrow. Its R&D department has been striving for years to develop product formulas which are more and more responsible.

The automobile/motorcycle line Owatrol® offers does not stray from this and provides **high quality solutions** in order to preserve substrates for as long as possible (chrome, plastic, lights, rocker panels, etc.).

OWATROL®... products that make maintaining your automobile or motorcycle easier!

SUMMARY

| | |
|--|----|
| RELEASING OIL & LUBRICANT TRANSYL® | 4 |
| COLOUR RESTORER FOR PLASTICS, CHROME, METAL, GRP POLYTROL® | 5 |
| PAINT CONDITIONER & RUST INHIBITOR OWATROL® OIL | 6 |
| CORROSIVE INHIBITING PRIMER OWATROL® C.I.P. | 7 |
| UNIVERSAL ANTI-RUST PRIMER PID60 | 8 |
| DECORATIVE MATT PAINT PRIMER AP.60 | 9 |
| DECORATIVE GLOSS PAINT - RUST INHIBITING RUSTOL-DECO | 10 |
| ALUMINIUM PAINT FINISH OWATROL® RA.85 | 11 |
| GALVANISED COLOURED FINISH OWATROL® GALVA | 12 |
| MULTI PURPOSE STRIPPER DSP 800 | 13 |
| UNIVERSAL POLYESTER PUTTY COSMOFER® | 14 |
| POLYESTER PUTTY REINFORCED WITH FIBREGLASS CHOUKROUT | 15 |
| MULTI-PURPOSE CONCENTRATED CLEANER PURA-TROL | 16 |


RELEASING OIL & LUBRICANT TRANSYL®*

A technical product that can be used for everything! TRANSYL® meets the needs of professionals, amateurs and industry leaders:

- Dissolves grease, asphalt, grease, resin.
- Works on its own, with unparalleled wetting and self-spreading action.
- Available in an aerosol format containing an extender and can be used in all positions (head up or down) to reach any corner.
- Free of silicone, acids and bases.
- Working temperature range: -30°C to +50°C.
- Lubricates and unblocks assemblies that are seized due to rust.
- Breaks down rust.
- Removes water and moisture.
- Non-conductive, insulates electrical systems.
- It does not attack O-rings and rubber.

Packaging:

200ml spray - 400ml spray
1L - 5L - 20L

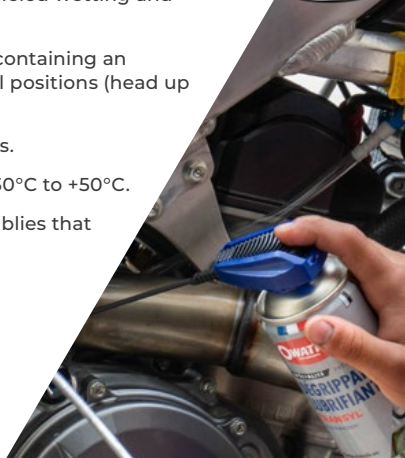

APPLICATION
TEMPERATURE
-30°C to +50°C



UNSCREW
EFFORTLESSLY

COLOUR RESTORER FOR PLASTICS, GRP, CHROME, METAL

POLYTROL®*

Restores colour and appearance to old paint, plastic and gelcoats that have become tarnished weathered:

- Improves plastics that have become brittle and flaky. Preserves their flexibility.
- Without any chemical action.
- Free of aggressive solvents.



Packaging:

250ml spray - 500ml - 1L - 20L



COVERAGE
± 18 m²/L



APPLICATION
TOOLS
Brush, Cloth



APPLICATION
TEMPERATURE
+5°C to +35°C



WORKING TIME
BEFORE
WIPING OFF
10-20 min.



CLEAN-UP
WHITE SPIRIT

* Dangerous - Follow the precautions for use.

PAINT CONDITIONER & RUST INHIBITOR OWATROL® OIL*

Transparent rust inhibitor with excellent wetting action:

- Removes air and moisture from the substrate.
- Can be applied direct to sound rusted surfaces.
- Forms a protective, isolating and flexible film.
- Easy to use, no sanding or sandblasting.
- Can be over coated with any oil or alkyd based paint.
- Paint additive: makes oil or alkyd based paints easier to use and gives them rust inhibiting properties.



Packaging:

300ml spray - 125ml - 500ml
1L - 5L - 20L



COVERAGE
± 18 m²/L



APPLICATION
TOOLS
Brush, Roller, Spray



APPLICATION
TEMPERATURE
+5°C to +35°C



DRYING TIME 12H
RECOATING TIME
24-48H



CLEAN-UP
WHITE SPIRIT

CORROSIVE INHIBITING PRIMER OWATROL® C.I.P.*

Rust inhibitor that can be over coated with any single and two-component paint: polyurethane, epoxy, chlorinated rubber, automotive paint, etc.:

- Impregnates and penetrates deep down to the raw metal.
- Withstands temperatures up to +175°C.
- Can be applied on new or heavily rusted substrates.
- Isolates and passivates. It completely stops rust and stabilises the substrate for further finishing.
- A solid and flexible film associated with active pigments in order to eliminate any risk of cracking.
- Adheres and sticks to metal substrates.
- Fills in any recessed areas.



Packaging:

750ml - 2.5L - 20L



BRICK RED



COVERAGE
± 15 m²/L



APPLICATION
TOOLS
Brush, Roller, Spray



APPLICATION
TEMPERATURE
+5°C to +35°C



DRYING TIME
TOUCH DRY 6H
RECOAT TIME
48-72H



CLEAN-UP
WHITE SPIRIT

UNIVERSAL ANTI-RUST PRIMER PID60*

- Use on ferrous and non-ferrous metals.
- Good opacity.
- Excellent adhesion.
- Good filling properties.
- Overcoat with all types of finishes – 1 or 2 pack.
- Use on all areas of bodywork – Interior and exterior.



Packaging:
750ml - 2.5L



**GREY
RAL 7015**



COVERAGE
12 m²/L



**APPLICATION
TOOLS**
Brush, Roller, Airless
Spray, Electrostatic
Process (Contact us)



**APPLICATION
TEMPERATURE**
+5°C to +35°C



DRYING TIME
TOUCH DRY 20 min.
RECOAT TIME
60 min.



CLEAN-UP
WHITE SPIRIT

DECORATIVE MATT PAINT PRIMER AP.60*



- Ensures improved and decorative rust inhibiting protection.
- Long-lasting stoppage and stabilisation of rust.
- All substrates - Direct onto rust, slightly rusted metals, etc.
- Flexible film, does not crack. Anti-UV protection.
- Withstands temperatures up to +175°C.
- Can be over coated with any single pack oil or alkyd based paint.
- Matt appearance.



© Ultratony

* Dangerous - Follow the precautions for use.

Packaging:

750ml - 2.5L - 20L



WHITE



GREY



BLACK



BRICK RED



COVERAGE
PER COAT
± 16 m²/L



APPLICATION
TOOLS
Brush, Roller, Spray



APPLICATION
TEMPERATURE
+5°C to +35°C



DRYING TIME 6-8H
RECOATING TIME
24-48H



CLEAN-UP
WHITE SPIRIT

⚠ Especially designed for using on bodywork when restoring old vehicles, ask us about using it for any other bodywork

DECORATIVE GLOSS PAINT - RUST INHIBITING RUSTOL-DECO*



- Can be applied directly onto sound rust due to the excellent penetration, isolating and adhesion of OWATROL® OIL*.
- Adheres to any surface; RUSTOL-DECO penetrates down into the tiniest pores and firmly sticks and bonds to the surface.
- Exceptionally resistant to weathering, moisture and pollution.
- Can be applied directly onto lightly rusted metals.
- Withstands temperatures up to +175°C.
- Flexible film, does not crack. Excellent adherence.

Packaging: 750ml - 2.5L - 20L

Available in 10 bright RAL colours:



RAL 9010
PURE
WHITE



RAL 7037
DARK
GREY



RAL 7040
GREY



RAL 9005
BLACK



RAL 6009
DARK
GREEN



RAL 5002
BLUE



RAL 3001
DEEP RED



RAL 8028
BROWN



RAL 1007
YELLOW



RAL 6005
GREEN

+ 3 micaceous colours
and 3 bases for
matt/satin/gloss.



COVERAGE
± 15 m²/L



APPLICATION TOOLS
Brush, Roller, Spray



APPLICATION TEMPERATURE
+5°C to +35°C



TOUCH DRY 6H
RECOAT TIME 24H



CLEAN-UP
WHITE SPIRIT

⚠ Especially designed for using on bodywork when restoring old vehicles, ask us about using it for any other bodywork

ALUMINIUM PAINT FINISH OWATROL[®] RA.85*



- Isolating rust inhibiting finish providing long-lasting stoppage and stabilisation of rust.
- OWATROL[®] OIL based : compatible with all substrates.
- Zinc-played or aluminium finish.
- Excellent film-forming ability (adhesion, flexible and does not run).
- Temperature resistant up to +175°C.



Packaging:

750ml - 2.5L - 20L



COVERAGE
± 18 m²/L



APPLICATION
TOOLS
Brush, Roller, Spray



APPLICATION
TEMPERATURE
+5°C to +35°C



DRYING TIME
TOUCH DRY 4-6H
RECOAT TIME 24-48H



CLEAN-UP
WHITE SPIRIT

* Dangerous - Follow the precautions for use.

GALVANISED COLOURED FINISH

OWATROL® GALVA*

- Increases the brightness.
- “Resistant galvanised” appearance due to an excellent coating of metallic particles through the OWATROL® OIL* binding agent, also avoids flaking.
- Can be over coated with any kind of paint or varnish.
- Highly resistant to atmospheric agents.
- Excellent wetting and penetrating action.
- Excellent anti-corrosion properties.
- Very good film-forming properties (adhesion, flexibility, film evenness).
- Withstands temperatures up to +175°C.



Packaging:

300ml spray



COVERAGE
18 m²/L



APPLICATION
TEMPERATURE
+5°C to +30°C



TOUCH DRY 12H
RECOAT TIME 24H




CLEAN-UP
WHITE SPIRIT

MULTI PURPOSE STRIPPER

DSP 800*

- Works on all surfaces (except plastic).
- Will remove all types of coatings.
- Vertical and horizontal surfaces.
- Fast acting.
- Ready to use.
- Gel formula. Will not run or sag.
- Surface can be recoated after 6 hours.

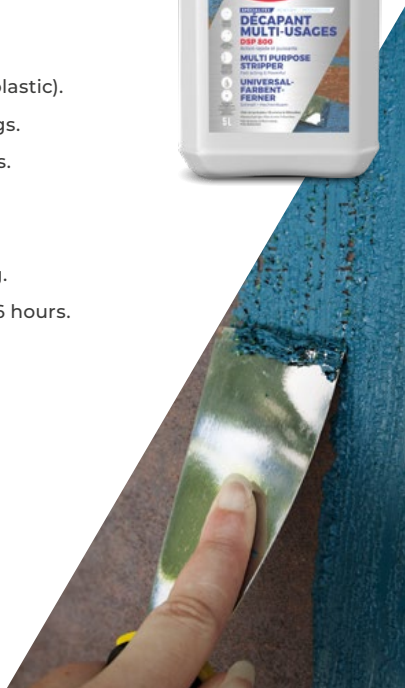

Packaging:

1L - 5L



COVERAGE
1.25 - 4 m²/L



APPLICATION
TOOLS
Synthetic brush,
synthetic scrubbing brush,
soft brass brush, scraper



APPLICATION
TEMPERATURE
+10°C to +25°C



WORKING TIME
5-45 min.




CLEAN-UP
WARM WATER
OR WHITE
SPIRIT

UNIVERSAL POLYESTER PUTTY COSMOFER®*

- Fills, seals, blocks, joins, seals, isolates, glues, attaches to all substrates.
- Two-component - True cold welding.
- Very easy to use - easy sanding.
- Ability to adjust the setting time according to need.
- Once hard, it can be mechanically machined, drilled, tapped, filed, ground, sawed and screwed, etc.
- Can be applied on any kind of paint (one or two-component).
- Good resistance to heat (+120°C), vibrations and chemical products.
- Highly elastic, does not crack or shrink, does not clog abrasives.



Packaging:
250 g - 1 kg

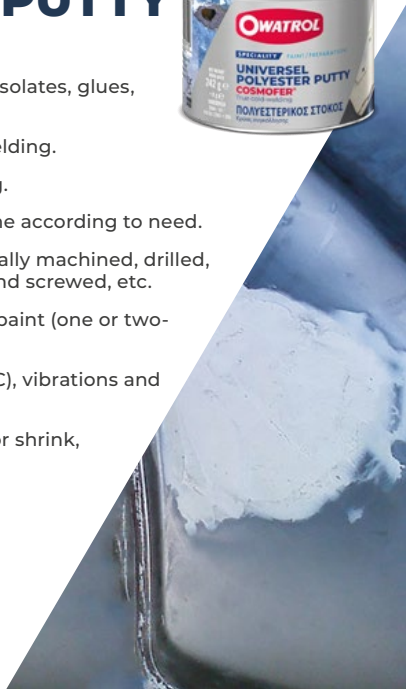

* Dangerous - Follow the precautions for use.




**APPLICATION
TOOLS**
Spatula, Gloves

POLYESTER PUTTY REINFORCED WITH FIBREGLASS CHOUKROUT*



- Cold weld.
- Two-component. Fills, seals, blocks, joins, seals, isolates, glues, attaches, etc.
- Excellent adhesion on most application surfaces: metal, aluminium, wood, stone, polyester, etc.
- Very easy to use - easy sanding.
- Once hard, it can be mechanically machined, drilled, tapped, filed, ground, sawed and screwed, etc.
- Can be applied on any kind of paint (one or two-component).
- Good resistance to heat (+ 120°C), vibrations and chemical products.
- Highly elastic, does not crack or shrink, does not clog abrasives.

Packaging:
300 g - 600 g

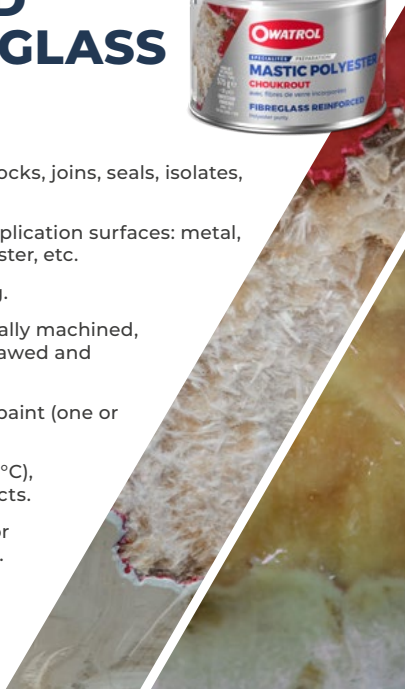

* Dangerous - Follow the precautions for use.



**APPLICATION
TOOLS**
Spatula, Gloves

MULTI-PURPOSE CONCENTRATED CLEANER

PURA-TROL*

- Any surface.
- Strong detergent and degreasing action.
- Cleans road film off the body, dislodges dirt, dust and insects.
- Removes brake pad residue as well as rubber from tyres effortlessly.
- Degreases rims, rocker panel, exhaust pipe, engine, chassis, forks, exhaust, visor, etc.
- pH neutral. Does not pose a risk to substrates:
 - Plastic (polyester, plexiglass, sheeting, dashboard, etc.).
 - Metals like aluminium and chrome as well as paint.
 - Fabrics, leather.



Packaging:

1L - 20L



COVERAGE
1 L = 20 L
OF DILUTED
PRODUCT



**APPLICATION
TOOLS**
Spray bottle, Brush



**APPLICATION
TEMPERATURE**
+10°C to +25°C



**CLEAN-UP
WATER**

* Dangerous - Follow the precautions for use.



Founded in 1923, Durieu Groupe is a **family SME of 150 employees with an international dimension**, part of an innovative and eco-responsible approach.

The group manufactures in France, in its own production sites, and distributes **high-tech products** (such as paints, stains, varnishes, plastic renovators, lubricants, detergents) intended **to protect and embellish supports mainly made of metal and wood**.

Its know-how is appreciated by professionals (wood industry specialists, wholesalers, DIY superstores, garden centres, architects, etc.) and the general public, looking for high-performance solutions designed for long-lasting and comfortable living spaces.

The group's unchanging ethic of **offering products without compromising on performance or regulations**, with lasting effects over time, is a major asset that allows it to adapt to the challenges of tomorrow.

Its R&D department has also been working for years to **imagine increasingly responsible product formulas**.

In addition, the group provides individualised support recognised for its availability and responsiveness to meet customer expectations.

OWATROL

INTERNATIONAL S.L.U.

C/ Consell de Cent 322, entlo D
08007 BARCELONA - SPAIN

Phone: +34 931 258 868
eMail: info@owatrol.com

Need advice?
Contact our experts on
owatrol.com



Our company approach to implementing our environmental responsibility:

- Development of increasingly responsible products.
- Management and processing of product waste.
- Use of recyclable packaging
- Encourage eco-friendly use.

OWATROL

is a brand



durieu.com

