



SPECIALITY

RUST INHIBITOR

OWATROL® OIL



CHOOSE OWATROL®,
IT'S THE CERTAINTY OF
A LASTING PARTNERSHIP.

owatrol.com

OWATROL®
ADD LIFE TO YEARS



Royal Nord CT 1963 @vintagemobylette



What is OWATROL® OIL ?

OWATROL® OIL is a versatile, highly penetrating oil that has the ability to stabilise rust and stop it spreading.

It can be applied direct to rusted surfaces and also be used as an additive in any oil or alkyd based paints.

When applied directly to a rusted surface, it creates a tough, flexible finish that removes excess moisture and air; displacing it from the rusted metal, so stopping the rust.

When used as an additive it gives anti-rust properties to the paints and improves their quality, durability and elasticity.



What are the main attributes of OWATROL® OIL?

- Easy to apply.
- Apply direct to rusted surfaces.
- Penetrates deeply into rusted surfaces, removing excess moisture and air.
- Creates a solid stable layer that other paints can be applied directly and firmly adhere to.
- Maintains the natural colour of the rust - Can be used for patina techniques to give an aged appearance / «VINTAGE» look.
- Completely seals and protects sound underlying metal against further corrosion.
- Compatible with all oil and alkyd based paints.
- Apply to non-ferrous metals e.g. zinc, aluminium, copper...
- Compensates for the adverse effects that weather, surfaces and other climatic conditions have on paint e.g. hot, cold or windy conditions - Eases application of the paint.
- Can be over coated with OXID VERNIS (same manufacturer) to maintain the rusted look longer term.



Where can OWATROL® OIL be used?



- Indoor and outdoor use.
- Horizontal and vertical surfaces.
- Directly on rusty surfaces.
- On painted surfaces that have rust spots.
- On car chassis and rusty frames on engines, bikes, scooters ...
- Steel structures, railings, pipes, grates, stairs ...
- Machinery, engine components, trailers ...
- On metallic surfaces such as stainless steel, nickel, bronze, aluminium.
- On wooden surfaces, dry, porous and soft.






Owatrol® Oil protects rusted metal



What is rust?

Contains air and Moisture

Rusted surfaces are the result of an electrochemical reaction, which has destroyed the composition of the metal. This rusty and extremely absorbent surface, absorbs moisture and air, traps corrosive liquids, which constantly eat the exposed metal deeper and deeper.

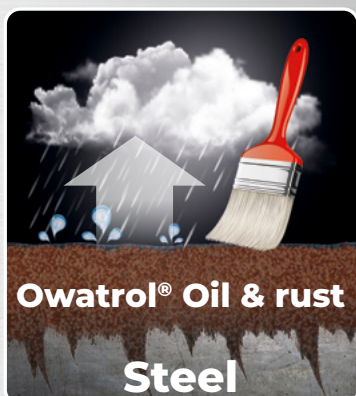


How Owatrol® Oil stabilises rust:

Eliminates air and moisture


Owatrol® Oil penetrates at high speed to the surfaces on which it is applied. This impregnation spreads in all directions, especially downwards. This exceptional penetration carries it in and around the deepest fine grains of rust. Thus, Owatrol® Oil dispels air and moisture and turns rust into a water-proof, protective, insulating layer on top of which colour can also be applied.

Owatrol® Oil spreads rapidly

A single drop of owatrol diffuses to an area approximately **150 times its original size**.

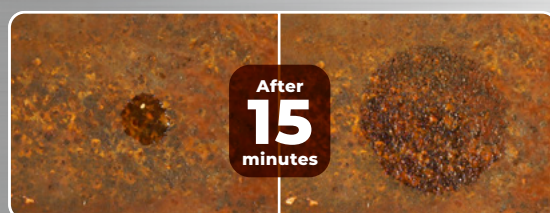

Owatrol® Oil possess exceptional creeping power

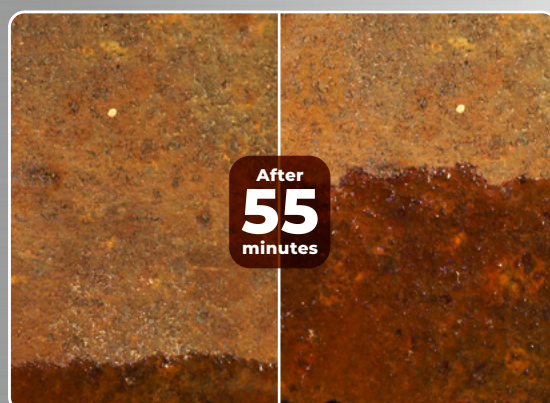



How is OWATROL® OIL applied?

For prevention and protection

- 1 - Make sure the surface is clean, dry and free of oils and grease.
- 2 - Apply OWATROL® OIL with a brush, roller or spray.
- 3 - Allow to dry (at least 24 hours).

On rusted surfaces

- 1 - Make sure the surface is clean, dry and free of oils and grease.
- 2 - Gently scrape the surface to remove any loose and flaking rust. Do not remove firm rust.
- 3 - Apply OWATROL® OIL wet-on-wet with a brush, roller or spray until surface is saturated.
- 4 - Allow to dry (at least 24 hours).
- 5 - Finish 4 options: Leave OWATROL® OIL as is, coat with OXID VERNIS (same manufacturer), coat with RUSTOL DECO (same manufacturer), coat with Paint + OWATROL® OIL.

Using as a Conditioner

Topcoat: 5 to 20% by volume.

Undercoat: Up to 30% by volume.

Primer: Up to 50% by volume.



© Yesterdaysbike



OWATROL® OIL
PAGE PRODUCT



5L



1L



500ml



Spray
300ml

Available
can sizes

OWATROL®
INTERNATIONAL S.L.U.

Travesera de Gracia 62, 1º5ª
08006 BARCELONA - SPAIN
Phone : +34 931 258 868

eMail

info@owatrol.com

Website

owatrol.com

OWATROL®
ADD LIFE TO YEARS

a trademark



ADFIELDS - 05/21 - Tours RCS 331 998 484 - 02 47 66 90 67 - XD0C98GB