

Before

After

SPECIALITY

COLOUR RESTORER **POLYTROL®**



Before



After



CHOOSE OWATROL®,
IT'S THE CERTAINTY OF
A LASTING PARTNERSHIP.
owatrol.com

OWATROL®
ADD LIFE TO YEARS



Before



After



What is POLYTROL® ?

POLYTROL® is a clear, deep penetrating oil that restores the original look and finish to many surfaces. Non-film forming and flexible, POLYTROL® penetrates deeply, restoring the colour and lustre to surfaces that have faded due to sun, rain and pollution.

APPLICATION
VIDEO



What are the main properties of POLYTROL® ?

- Rejuvenates and restores colour to plastic surfaces.
- Restores the shine to polished metals.
- Protects against corrosion.
- Dries to a tough, long-lasting finish.
- Non-film forming - No peeling or flaking.
- Colourless.
- Easy to apply.
- Does not contain silicone.



What surfaces can POLYTROL® be used on?



- Plastic trim e.g. bumpers, aprons, mirrors on cars, scooters and other machinery.
- Metal surfaces e.g. Stainless Steel, Aluminium, Bronze, Chrome that have faded and are showing signs of corrosion.
- Aluminium or composite doors and windows that have faded and lost their shine.
- Painted surfaces that have faded.
- GELCOAT which has lost its glow – shipping.
- Tiles and stones that have faded e.g. marble, slate, terracotta tiles.
- Vertical and horizontal surfaces.



Before

After

POLYTROL®

PROPERTIES AND APPLICATIONS

Attacked by bad weather and UV rays, parts and accessories made of plastic or gelcoat lose their colour and shine. Metal elements, on the other hand, tarnish and oxidise.

GELCOAT, PAINTS OR PLASTIC...

WITHOUT POLYTROL®

The formation
of microcavities
dulls the surface

WITH POLYTROL®

Fills the
microcavities,
brightens
the surface

CHROME, STAINLESS STEEL, ALUMINIUM...

WITHOUT POLYTROL®


Rust spots
and oxidation
appears


WITH POLYTROL®

De-oxidises and
provides a bright
protective film

POLYTROL® not only revives and protects without polishing, but also nourishes and keeps the flexibility of plastics. Can be used on plastic, gelcoat and other materials (marble, terracotta tiles,...), as well as on tarnished paint films.

Compared to common abrasive powders or creams that only remove the rust or oxidised areas of aluminium, to allow the healthy metal to reappear, POLYTROL® de-oxidises while providing a durable, protective finish that protects metals exposed to bad weather.

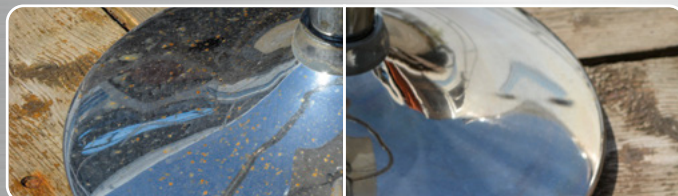

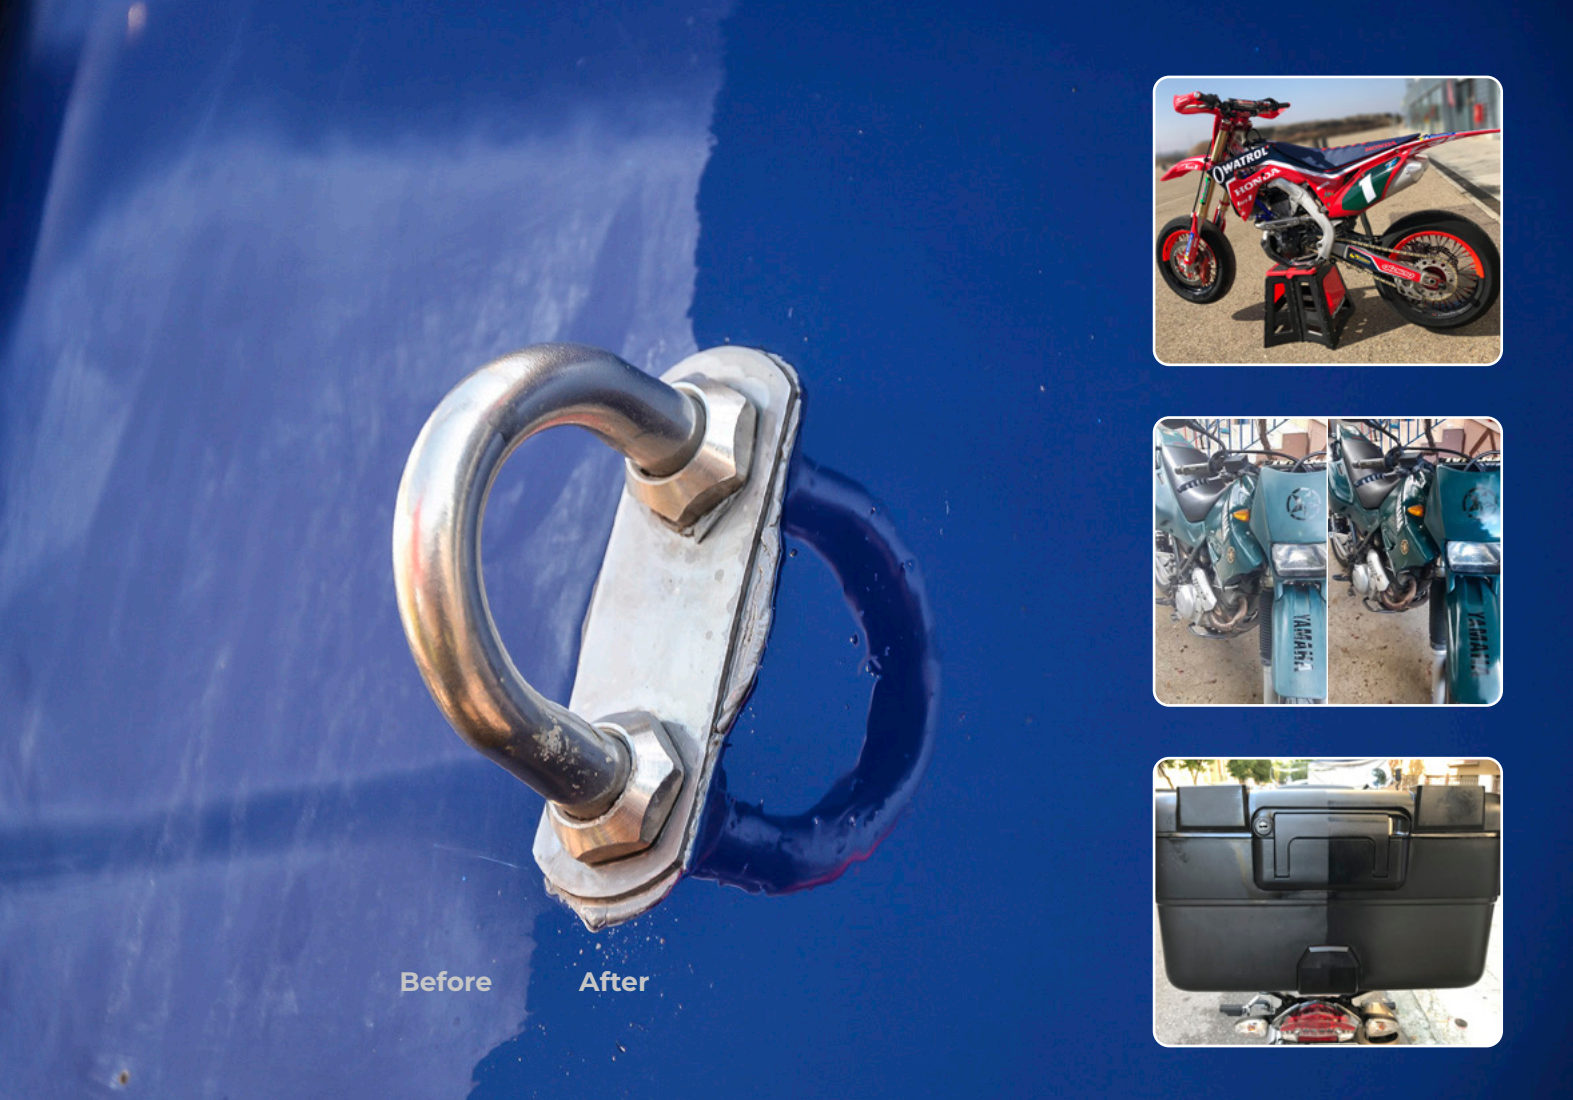

How does POLYTROL® work and what application tools do you need ?

- 1** - First, the surface should be washed very thoroughly with a powerful cleaner such as PURA-TROL or NET-TROL® to remove any dirt, grease, etc. from the surface.
- 2** - Remove any material that can prevent POLYTROL® from penetrating, such as wax, polish, etc.
- 3** - Before applying POLYTROL®, make sure the surface is dry and clean.
- 4** - We prefer application in a closed area in order to prevent dust from sticking in the application process and to shade it from direct sunlight.
- 5** - Apply the material with a brush or cloth.
- 6** - After 10-20 minutes, wipe the surface with a lint-free cloth to remove any excess POLYTROL® that has not been absorbed by the surface and to give a final uniform result.
- 7** - Allow the surface to dry for 1 day without getting wet.
- 8** - The material, when dry, is no sticky, does not collect dust and is not removed when washed.



On metal surfaces and stainless steel

- 1** - Follow the steps 1 and 2 above.
- 2** - Apply POLYTROL® with wire wool (000 grade) or an abrasive pad.
- 3** - Wipe with a lint-free cloth.

The above is meant as a guide only. Always refer to the Technical Data sheet and can for detailed instructions.

POLYTROL®
PAGE PRODUCT



Available
can sizes



1L



500ml



Spray
250ml

OWATROL®
INTERNATIONAL S.L.U.

Travesera de Gracia 62, 1^o5^a
08006 BARCELONA - SPAIN
Phone : +34 931 258 868

eMail

info@owatrol.com

Website

owatrol.com

OWATROL®
ADD LIFE TO YEARS

a trademark



ADFIELD - 05/21 - Tours RCS 331 998 434 - 02 47 56 90 67 - XD0C100GB